2 Mega Pixel

Water-Proof IP Camera

User Manual



Please read this instruction carefully for correct use of the product

Before use this product

- **Before operation, we strongly advise users to read this manual and keep it properly for using later.**

- **There may be several technically incorrect places or printing errors in this manual. The updates will be added into the new version of this manual. The contents of this manual are subject to change without notice.**

- **When this product is in use, the relevant contents of Microsoft, Apple and Google will be involved in. The pictures and screenshots in this manual are only used to explain the usage of our product. The ownerships of trademarks, logos and other intellectual properties related to Microsoft, Apple and Google belong to the above-mentioned companies.**

Table of Contents

1 Introduction....1

1.1 Summarization....1

1.2 Check Package Content....1

1.3 Connection....1

2 Installation....2

2.1 Install IP-CAM to Ethernet Network....2

2.2 Install CMS....2

3 IE Remote Access....4

3.1 LAN....4

3.1.1 Access through IP-Tool....4

3.1.2 Directly Access through IE....5

3.2 WAN....7

4 Remote Preview....8

4.1 The Remote Preview Interface....8

4.2 Record Playback....8

4.3 Right-click Function....9

4.4 Snap Pictures....9

5 Remote Live Surveillance....11

5.1 System Configuration....11

5.1.1 Basic Information....11

5.1.2 Date & Time Configuration....12

5.2 Video Configuration....12

5.2.1 Camera Configuration....12

5.2.2 Video Stream....13

5.2.3 Time Stamp....13

5.3 Alarm Configuration....14

5.3.1 Motion Detection Area....14

5.3.2 Motion Detection Trigger....14

5.3.3 Motion Detection Schedule....15

5.4 Network Configuration....16

5.4.1 Port....16

5.4.2 Wired....16

5.4.3 NET Traversal Configuration....17

5.4.4 Server Configuration....18

5.4.5 IP Notify....18

5.4.6 DDNS Configuration....19

5.4.7 RTSP....21

5.4.8 UPNP....22

5.4.9 Mail Setting....22

5.4.10 FTP....23

5.5 Advanced Configuration....24

5.5.1 User Configuration....24

5.5.2 Onvif Configuration 25
5.5.3 Security Configuration 26
5.5.4 Configure Backup & Restore 26
5.5.5 Reboot Device 27
5.5.6 Upgrade 27
6 Mobile Surveillance 28
6.1 Network Configuration 28
6.2 By Phones with iPhone OS 28
6.3 By Phones with Android OS 38
7 Use method for IP-TOOL 44
8 Q & A 47
9 Specification 49

1 Introduction

1.1 Summarization

This device (short for IP-CAM) is designed for high performance CCTV solutions. It utilizes most advanced technologies, such as video encoding and decoding technology and complies with the TCP/IP protocol, SoC., etc to ensure this system more stable and reliable. This unit consists of two parts: the IP-CAM device and central management software (short for CMS). The CMS centralizes all devices together via internet or LAN and establishes a sound surveillance system to realize unified management and remote operation to all devices in one network.

This product is widely used in banks, telecommunication systems, electricity power departments, law systems, factories, storehouses, uptowns, etc. In addition, it is also an ideal choice for surveillance sites with middle or high risks.

1.2 Check Package Content

The pictures below are only for reference. Please make the object as the standard.

IP-CAMERA	Quick Start Guide	CD

Accessories	Description
IP-CAMERA	The device without Lens
Quick Start Guide	The Brief instructions of the product
CD	CD-ROM with software and manual

1.3 Connection

Below figures will introduce function of interfaces.

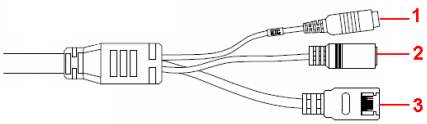

MIC: connect to MIC
DC12V: connect to power supply
LAN: network port; support PoE power supply

2 Installation

2.1 Install IP-CAM to Ethernet Network

The connection of digital video server is show below.

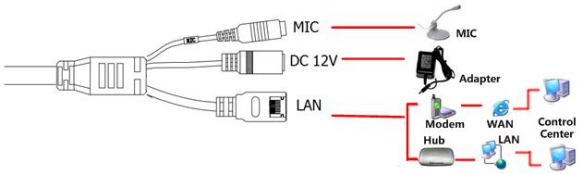

Figure 2-1 Connection

User can connect the PC and IP-CAMERA in accordance with above picture. Before connecting, please connect external devices, and then connect the power.
The connection steps are as shown below:
Step 1: Connect IP-CAM firstly.
Step 2: Internet line connect to Internet transfer equipment or devices
Step 3: Connect power cable to a power outlet.

2.2 Install CMS

You can remotely monitor and manage the device by using client software or IE browser. This chapter mainly introduces the installation of CMS. In respect of the operation and monitor setting details, please refer to CMS user manual in CD.

Note: Prior to installing control center software in user's computer, please make sure all anti-virus softwares in the computer are closed so that CMS can install correctly.

- **System requirement**

Supported Operating System:

Operating system	*Comments*
Windows XP	Windows XP SP2 or most updated patch; Direct 9.0c or above
Windows Vista	Windows Vista; Direct 10. c
Window 7	Window 7 Ultimate
Windows 2003	Windows 2003 serve or Directx 9.0c or above
Windows 2000	Windows 2000 SP4 or Directx 9.0c or above

- **Computer hardware requirement**

Please make sure the software running well and the computer is compatible ：

Recommended PC Specification – 4 channels

Item	*Specification*
CPU	Intel Pentium 3.0 GHz or AMD 3000+
Memory	1GB
HDD	160GB

Recommended PC Specification -9 channels:

Item	*Specification*
CPU	Intel Core 2 Duo 1.8 GHz or AMD Dual core 3800+
Memory	1GB
HDD	250GB

Recommended PC Specification -16 channels:

Item	*Specification*
CPU	Intel Core 2 Duo 2.2 GHz or AMD Dual core 3800+
Memory	2GB
HDD	250GB

Notice:

- The AMD chip hyper-3800+ and X64 series are not tested.
- For real-time view at CIF, max 25 channels can be played concurrently.
- For real-time view at D1, max 6 channels can be played concurrently.

Installation Process

It is recommended to disable the anti-virus software before the installation of CMS.

1. Run the 'Setup.exe' from software CD. Then install CMS according to the prompts.
2. After you install this software, double click it to run if necessary.
3. Find the user manual of the control center system from programs. You can operate this software according to the introduction of this user manual.

If you just want to user IP-tool, there is no necessary to install CMS software. You can open the CD and find the IP-tool software and double click it to install.

3 IE Remote Access

User can connect IP-Cam through LAN or WAN. Here only take IE browser (6.0) for example. The details are as follows:

3.1 LAN

In LAN, there are two ways to access IP-Cam: 1. access through IP-Tool; 2. directly access through IE browser.

3.1.1 Access through IP-Tool

Step 1: Make sure the PC and IP-Cam are connected to the LAN and the IP-Tool is installed in the PC from the CD.

Step 2: Use IP-Tool to modify the network of IP-Cam. Then, double click the

icon on the desktop to run this software as shown below:

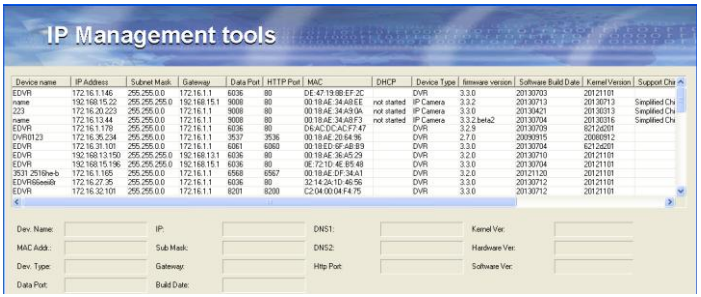

After starting IP-Tool and clicking the IP-Cam in the list, user can check the information of IP-Cam. If you cannot confirm which one is yours, please shut off the electricity of the IP-Cam and then power on it. When shutting off the power, the device information will disappear. When powering on, the device information will emerge. Well, this device is the used device. Right click the device information and select “Network setup”.

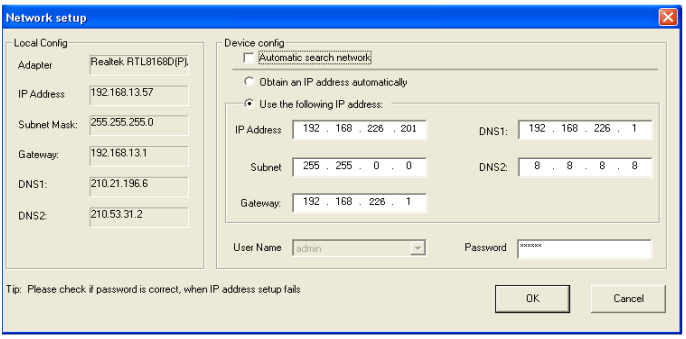

For example, the network segment of this computer is 192.168.13.x under the local config table. So, please modify the IP address, Gateway of IP-Cam which must be in the same network segment with the computer. Modifying the network, you have to input the password and click “OK” button to save the setting.

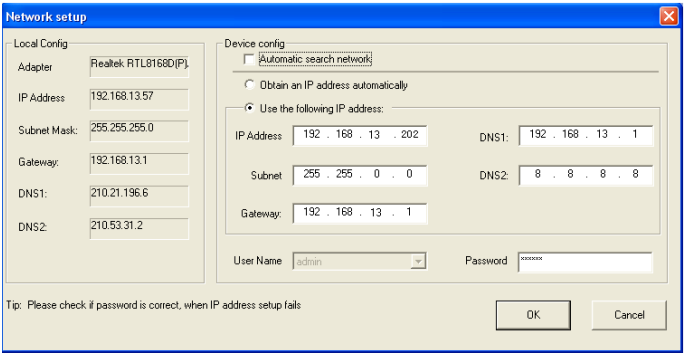

Note: The default user name is: admin. The default password is: 123456.

The new IP address of this device will display after modification.

Step 3: Use the IP-Tool to login the IP-Cam.

Right-click the IP address and select “browse with IE” or double click the device information. This will let the IE browser to connect IP-Cam as shown below. IE browser will auto download the Active X control. If the IE browser cannot download the Active X control, please refer to Q4 of Chapter 8. A login window will pop up after the installation of the Active X control.

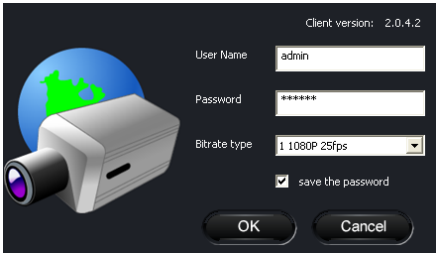

Input user name and password and then click “OK” button to login.

Note: You can also use the modified IP address of the IP-Cam. Input the IP address in the IE browser bar and then click “Enter” to access IP-Cam. The default user name is admin. The default password is 123456.

3.1.2 Directly Access through IE

The network service is default as shown below:

IP address: **192.168.226.201**
Subnet Mask: **255.255.255.0**
Gateway: **192.168.226.1**
HTTP: **80**
Data port: **9008**
When use the IP-CAM for the first time, you should connect the device with the above default settings.
Step 1: Manual setup the IP address of the PC. The network segment should be as same as the default settings of IP-CAM. Right click "My Network Places" icon on the desktop→select "properties" as shown in the left figure. Right click "Local Area Connection" at the popup window, and then select "property" as shown in the right figure.





Select "Internet Protocol (TCP/IP)" in the "General" tabs→click "properties"→manual input network address information of the PC in the pop up window.

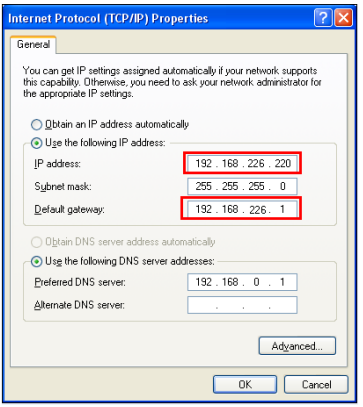
Internet Protocol (TCP/IP) Properties
General
You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.
Obtain an IP address automatically
Use the following IP address:
IP address: 192 . 168 . 226 . 220
Subnet mask: 255 . 255 . 255 . 0
Default gateway: 192 . 168 . 226 . 1
Obtain DNS server address automatically
Use the following DNS server addresses:
Preferred DNS server: 192 . 168 . 0 . 1
Alternate DNS server:
Advanced...
OK
Cancel

Step 2: Open the IE browser, input the default address of IP-CAM and confirm, the IE browser will download Active X control automatically. If IE browser can't download Active X control, please refer to Q4 of chapter 8.
Step 3: After downloading Active X control, the login dialog box will pop up.
Step 4: Input user name and password in the login dialog box and click "OK" button to enter into the live interface where you can manage the IP-CAM.

3.2 WAN

a. Access through router or virtual server

Step1: Connecting according to above steps in LAN; enter into System Configuration→Network configuration→Basic configuration to setup the port number as shown in Fig 3-1:

Step 2: Enter into System Configuration→Network configuration→IP configuration to change IP address as shown in Fig 3-2:

Notice: The steps above should be saved after the change of the port and IP address. Log back in the device with the saved setting.



Fig 3-1 Port setup

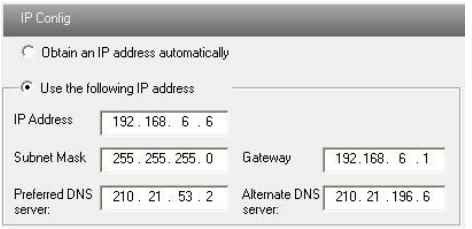
IP Config
Obtain an IP address automatically
Use the following IP address
IP Address
192 . 168 . 6 . 6
Subnet Mask
255 . 255 . 255 . 0
Gateway
192.168. 6 . 1
Preferred DNS server:
210 . 21 . 53 . 2
Alternate DNS server:
210 . 21 . 196 . 6

Fig 3-2 IP setup

Step 3: Enter into the router's management interface through IE browser and forward the IP address and port of IP-CAM in the "virtual server" (the name depends on the router). Please refer to Fig 3-3:

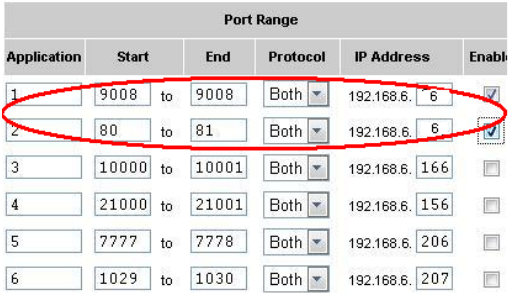

Fig 3-3 Router Setup

Step 4: Open the IE browser and input its WAN IP and http port to access. The following steps are as same as "Step 2, 3 and 4" of Chapter 3.1.2.

4 Remote Preview

4.1 The Remote Preview Interface

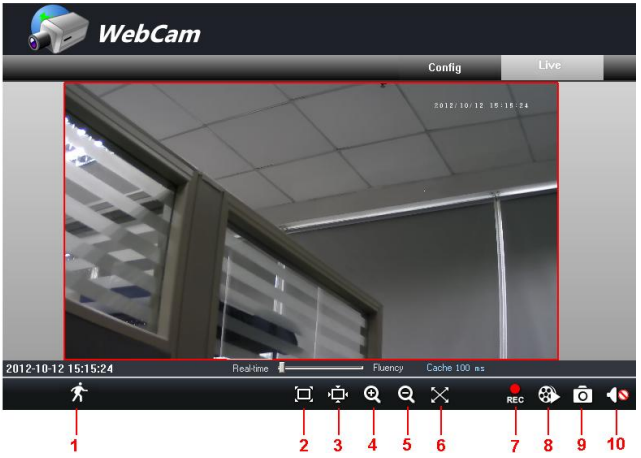

Fig 4-1 Remote Preview

1	People icon	2	Fix size	3	Zoom in
4	Zoom in	5	Zoom out	6	Full screen
7	Start record	8	Playback	9	Snap
10	Enable audio				

- When motion detection alarm is triggered, the people icon turns red.
- Click icon to zoom in the preview image to suitable size. Drag the cursor on the enlarged image to view suitable preview area. Click icon to zoom out the enlarged image. Click icon to full-screen the live image.
- Clicking icon will appear a save path window and the record file can save on your PC.

Note: On Window 7 and Window Vista, user can not record or snap pictures until UAC function is disabled. Please refer to following steps: Start—Control panel—User accounts—Change user account control settings in which user needs to drag the scale to Always notify end and then click “OK” button to save.

4.2 Record Playback

Click icon and refer to Fig 4-2:

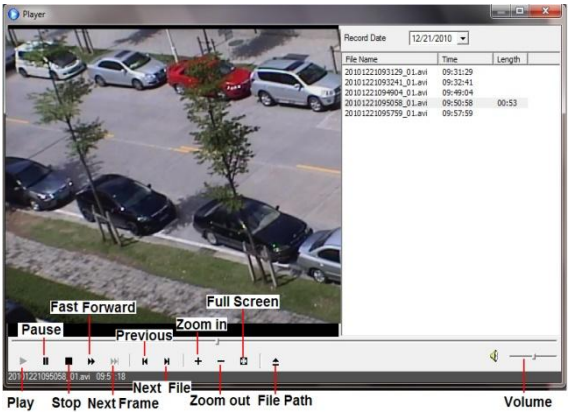

Fig 4-2 record playback interface

After selecting the record date, the record files will be displayed in the record file list box. You can double click a certain record file to playback or check a certain file. Then click Play button to do playback.

4.3 Right-click Function

Clicking right mouse will appear a pull-down list as below:

Fig 4-3 Right key sub-menu

Stream: There are two options.

Turn off the live: Click this item will close present live preview.

Enable audio: Enable remote audio transmission. Users can hear the audio from the IP-CAM.

Full screen: The live preview picture will full-screen display. Double click or click right mouse to return to the previous interface.

Online user: Display the users that access to the device.

System information: Display the device information: device name, firmware version, software build date, kernel version and hardware version.

4.4 Snap Pictures

1. Select the picture number and then click “Snap” icon as shown in the Fig 4-4:

2. You can snap multiple pictures. Select the picture number from Frame pull down list box, such as 2, and check “Title” and “Time” to show capture title and time on the snap pictures simultaneously. Refer to Fig 4-5:

3. Click “Browse” to set saving path. Click “Save” to save pictures to HDD on the computer. Click “Printer setup” to set the printer and print the snap pictures. Drag the

scroll bar to view all captured pictures.

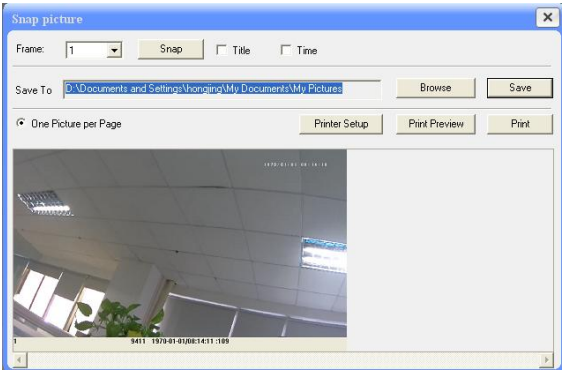

Fig 4-4 Single Snap

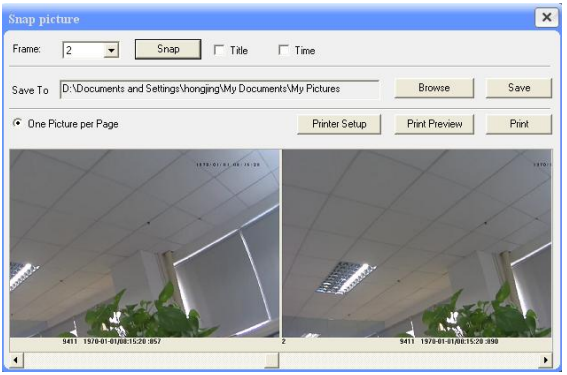

Fig 4-5 Multi-picture Snap

5 Remote Live Surveillance

Functions of remote configurations include: System Configuration, Video Configuration, Alarm Configuration, Network Configuration and Advanced Configuration. User should firstly select the menu on the left, and then setup the relative parameters. When a user setup parameters of a certain device, other users can not setup this device.

5.1 System Configuration

The “System configuration” includes two submenus: Basic Information and Date & Time.

5.1.1 Basic Information

In the “Basic Information interface, user can setup the device name and can also check the relative information of the server

Setting steps:

1. Clicking the "Config" icon will appear the menu list.
2. Clicking the “Basic Information "will pop up a window as shown in Fig 5-1:
3. Input the name of the device in the "Device name" text box.
4. Press the "Save" button to save the settings.

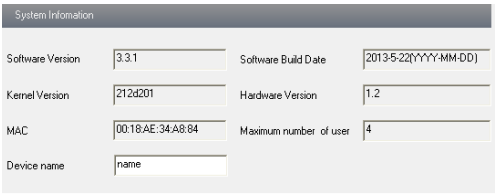

Fig 5-1 Basic Information Config

Please refer to the following table for parameters and instructions of server basic configuration.

Parameter	*Meaning*
Software version	The software of the device
Software build date	The software build date of the device
Kernel version	The kernel version of the device
Hardware version	The hardware version of the device
Mac Address	MAC address of device
Maximum number of user	Support max 4 users to access
Device name	Name of the device.

5.1.2 Date & Time Configuration

Setting steps:

1. Enter into "System Configuration" →"Date & Time". Refer to Fig 5-2:
2. Select "Modify Time ", user can self-define time. Choose "Time Zone" according to your location.
3. Enable DST to set DST mode and time.
4. Setup time by select the "Synchronize with NTP Server".
5. Press the "Save" button to save the settings.

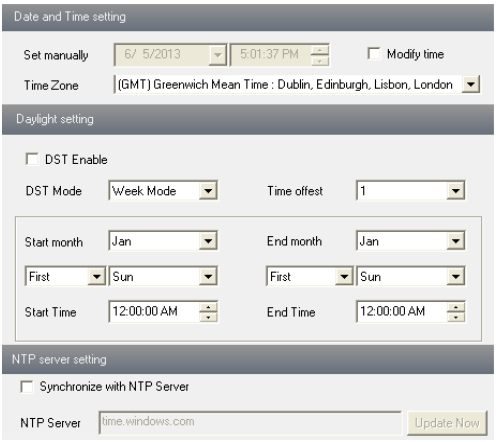

Fig 5-2 Date &Time Config

5.2 Video Configuration

Camera Configuration includes three submenus: Camera Configuration, Video Stream and Time Stamp.

5.2.1 Camera Configuration

Setting steps:

1. Enter into "Video Configuration "→ "Camera" interface as shown in Fig 5-3:

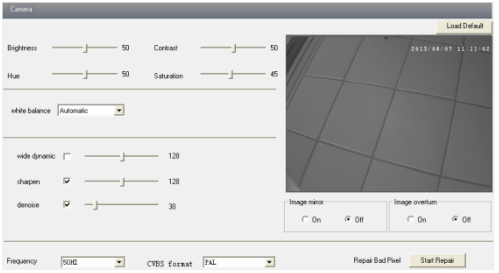

Fig 5-3 Basic Configuration

2. User can adjust Brightness, Contrast, Hue and saturation of the picture.
3. Select white balance mode.
4. .WDR, Sharpen, denoise, frequency and CVBS format are adjustable.
5. User can also enable the image mirror and image overturn function.
6. Click “Start Repair” button to repair bad point in the image.
7. Press the "Save" button to save the settings.

5.2.2 Video Stream

1. Enter into "Video configuration"→ "Video Stream" to see a interface as shown Fig 5-4:

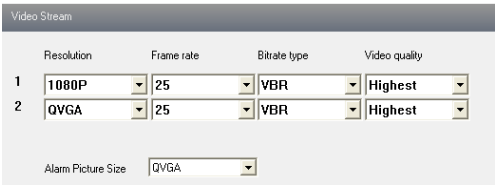

Fig 5-4 Video Stream

2. Select the resolution of the single frame image at the "Resolution" pull down list.
3. Select the quantity of video per second at the "Frame rate" pull down list.
4. Select the data stream type at the "Bit rate type" pull down list.
5. Set the video quality at the "Video quality" pull down list.
6. Select alarm picture size.
7. Press the "Save" button to save the settings.

5.2.3 Time Stamp

Enter into "Video configuration"→"Time Stamp" to display the interface as shown in Fig 5-5:

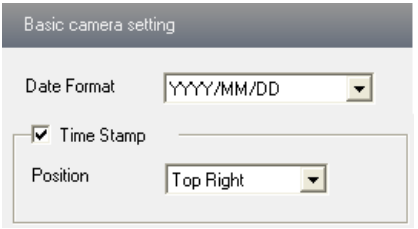

Fig 5-5 Time Stamp

1. Select Date Format to show in the live image.

Time stamp: time displayed in the live preview pictures. Four items can choose from: top left, top right, bottom left and bottom right.

2. Press the "Save" button to save the settings.

5.3 Alarm Configuration

Alarm configuration includes three submenus: Motion Detection Area, Motion Detection Trigger and Motion Detection Schedule.

5.3.1 Motion Detection Area

1. Enter into “Alarm configuration"→"Motion Detection Area" to see an interface as shown Fig 5-6:
2. Move the "Sensitivity" scroll bar to setup the motion trace sensitivity.
3. Check the "Add”, press the "Ctrl" button and move mouse to select the motion detection area; Select “Erase” and move the mouse to clear all motion detection area.
4. Press the "Save" button to save the settings.

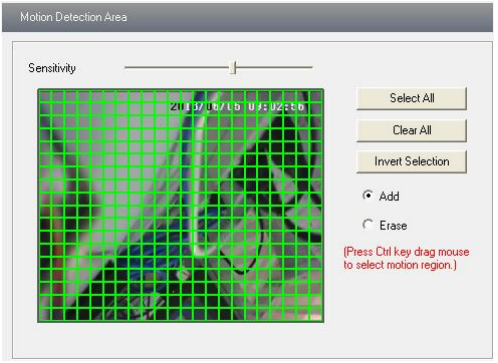

Fig 5-6 Motion Detection Area

5.3.2 Motion Detection Trigger

1. Enter into “Alarm Configuration"→ "Motion Detection Trigger" to display an interface as shown in Fig 5-7:
2. Check "Enable alarm" check box. Then all functions under this interface will be activated.
4. Trigger Email: Check “Attach picture” and select email addresses in the “Receival email address” text box(Email address shall be set first in the Mail config interface).Then the triggered snap pictures will be sent into those address. User also can define the subject and content of the email.
5. Trigger FTP: Check “Uploading picture”. Then the triggered snap pictures will be sent into FTP server address.

Note: Please refer to FTP configuration chapter for more details.

6. Press the "Save" button to save the settings.

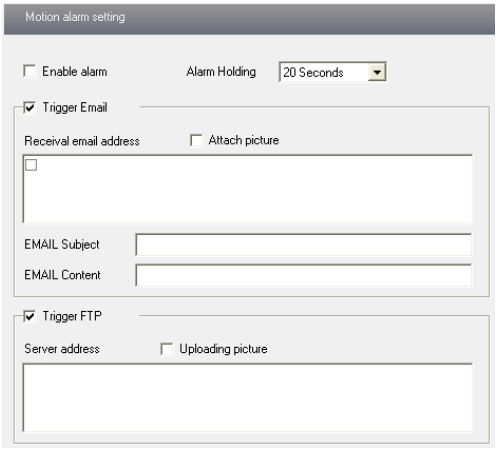

Fig 5-7 Motion Alarm Trigger

5.3.3 Motion Detection Schedule

Enter into “Alarm configuration"→ "Motion Detection schedule" interface as shown in Fig 5-8:

Week schedule

User could set the alarm time from Monday to Sunday for alarm everyday in one week.

Note: The lengthwise means one day of a week; the rank means 24 hours of a day. Mouse clicks on the pane to set the alarm hours. Green means selected area. Blank means unselected area.

2."Add": add the schedule for a special day.

3."Erase": delete holiday schedule

Day schedule

User could set alarm time for alarm in some time of special day, such as holiday.

1. Select a date at the "Date" pull down list, press "Add" button to add that date to the list box on the right side and then move the scroll bar to set the schedule of that day.

2. Select a date in the list box on the right side, and press "Erase" to remove the schedule on that day.

Press the "Save" button to save the settings.

Note: Holiday schedule is prior to Week schedule.

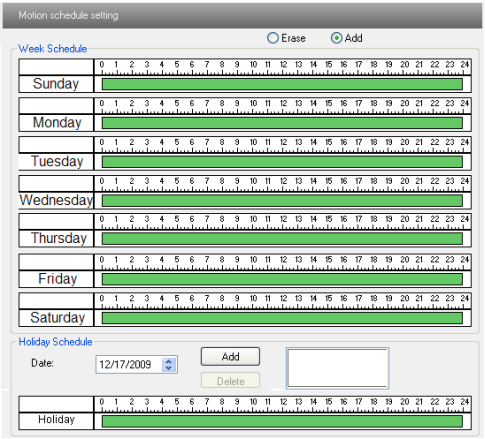

Fig 5-8 Motion Detection Schedule

5.4 Network Configuration

Network configuration includes ten submenus: Port, Wired, NET traversal Config, Server Configuration, IP Notify, DDNS Config, RTSP, UPNP, Mail Setting and FTP.

5.4.1 Port

1. Enter into "Network config"→"Port" to see the interface as shown in Fig 5-9:

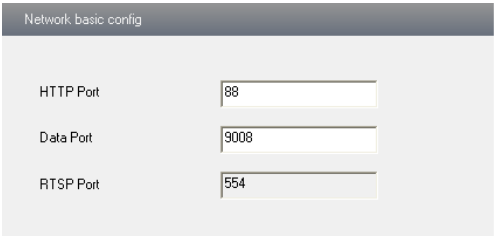

Fig 5-9 Port Config

2. Input port number for IE access in the "HTTP Port" textbox.
1. Input the port number for audio & video transmission in the "Data Port" textbox.

5.4.2 Wired

1. Enter into "Network Configuration"→"Wired" to see a tab as shown Figure 5-10:

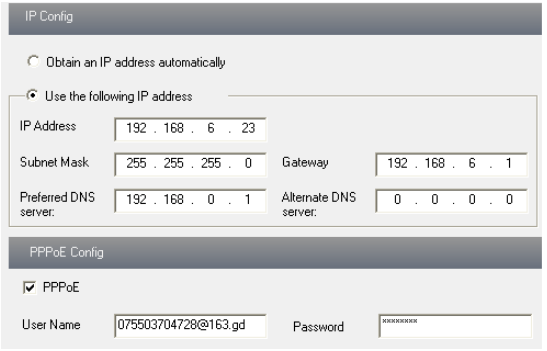

Fig 5-10 Wired Config

2. There are two Options for setup IP: obtain an IP address auto by DHCP protocol and use the following IP address, user can choose one of options for requirements.
3. Use the following IP address: display the IP address, subnet mask, gateway and DNS of the device.
4. PPPOE: User needs to manual input the user name and password for dial-up internet. Firstly, user needs to login IE clients, then enter into user name and password of PPPoE, save the setting and exit. Secondly, setup IP address change notice. Thirdly, connect with Modem, then the device will dial-up internet automatically.
6. Press the "Save" button to save the settings.

5.4.3 NET Traversal Configuration

In this interface, user can access to network without dynamic domain name and port forwarding by enabling NET transit.

1.Enter into “Network Configuration”→ “NET traversal Config”. Refer to Fig 5-11:

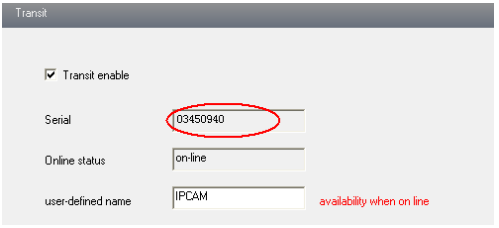

Fig 5-11 Transit

2. Check “transit enable”. Then save the setting.
3. Input www.upnpicp.com in IE address; download and install Active X. Then a window shows up as Fig 5-12:

Fig 5-12 Login

4. Input the only device ID of the IP-CAM or user-defined name. And then input user name and password.

Note: The default user name and password are "admin" and "123456" respectively.

5.4.4 Server Configuration

Enter into "Network Configuration"→ "Server Config". Please refer to Fig 5-13:

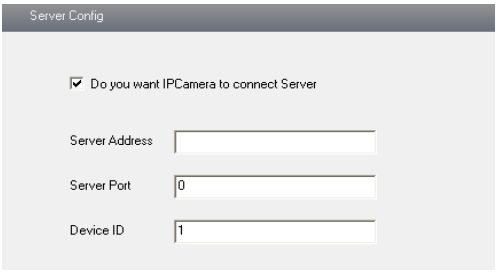

Fig 5-13 Server Configuration

1. Check "Do you want IP Camera to connect Server.
2. Check the IP address and port of the transfer media server in the ECMS/NVMS. Then enable the auto report in the ECMS/NVMS when adding a new device. Then input the remaining information of the device in the ECMS/NVMS. After that, the system will auto allot a device ID. Please check it in the ECMS/NVMS.
3. Input the above-mentioned server IP, server port and device ID in the responding boxes. Click "save" button to save the settings.

5.4.5 IP Notify

1. Enter into "Network Configuration"→"IP Notify" to see a tab as shown in Fig 5-14.
2. If the "Enable notifying change of IP" is selected, when the IP address of the device is changed, a new IP address will be sent to the appointed mailbox automatically. If "FTP" is selected, when the IP address of the device was changed, a new IP address will be sent to FTP server.

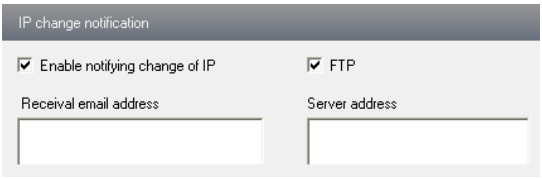

Fig 5-14 IP Notify Config

5.4.6 DDNS Configuration

1. Enter into "Network Configuration"→"DDNS Configuration" tab as shown in Fig 5-15:

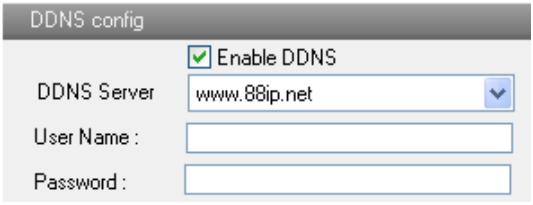

Fig 5-15 DDNS Config

Note: The steps to band a domain name for video surveillance server are as follows. Firstly, register a user name and a password to log on the website of service supplier, and then apply for a domain name online for the server. After that, users can visit the server through inputting the domain name at IE terminal.

2. Press the "Save" button to save the settings.
Please refer to the following table for parameters and instructions of DDNS configuration.

Parameter	*Meaning*
DDNS server	Address of the website which provided by domain name supplier. The optional: www.dns2p.net ， www.88ip.net ， www.meibu.com ， www.dyndns.com，www.no-ip.com，www.3322.org and mintdns type.
User name	Log in the website of domain name supplier
Password	Log in the website of domain name supplier

1. Apply the Domain Name (Take dns2p for example)

(1) Register in the Web

Step 1: Fill in the blank of IE address with ‘www.dns2p.com’.

Step 2: Click to enter the website.

Step 3: Click "New User" in the right of homepage to register. For example: User ID is ‘abc’, and password is ‘123456’. The register dialog display as below:

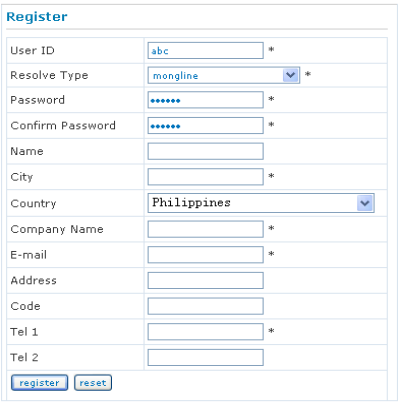

Register dialog box

(2) Login

Step 1: Return to homepage after registering successfully.

Step 2: Click "Account Manager" on the right of homepage to login.

Step 3: Input the username and password with the information that you have registered.

Step 4: Click "Enter" key after filling in the textbox.



Log in

(3) Domain Setup

Step 1: Click "Domain Management" on the left to set the domain.



Domain setup

Step 2: Input the domain in the textbox. For example, you set 'IP-CAMERA' as the domain.

Step 3: Click "Submit" button, the system will pop up a dialog box to show that the domain is added successfully.

Note: Time of probationary period is one month. If user wants to use it continuatively after one month, please Step 4: click "Buy Now" in the right of homepage to pay for it.

2. Setup in the IP-CAMERA

(1) DOMAIN

Domain is set in ‘1. Apply the Domain Name’. According to the example above, the domain is ‘WWW. IP-CAMERA.dns2p.com’.

(2) USER ID

Username of registered which is set in ‘(1) Register in the Web’. According to the example above, user ID is ‘abc’.

(3) PASSWORD

Password is set in ‘(1) Register in the Web’. According to the example above, password is ‘123456’.

Note: If the connection fails, press the "INFO" button. Now the system will display: ‘DDNS NONE’. Then you need to check network and information above and try again.

3. Application

Connect IP-CAMERA to the Network Client.

Step 1: After popping up the login interface, fill in "Server" textbox with ‘*.dns2p.com’ to visit the Network Client of the IP-CAMERA. The domain set in ‘(3) Domain Setup’. According to the example above, fill in "Server" textbox with ‘IP-CAMERA.dns2p.com’.

Step 2: Click "save" button to save the above setting.

5.4.7 RTSP

Enter into “Network Configuration”→ “RTSP” interface as shown in Fig 5-16:

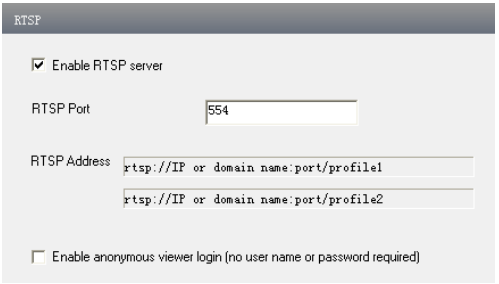

Fig 5-16 RTSP

1. Select “Enable RTSP server.
2. RTSP Port: Access Port of the streaming media. The default number is 554.
3.RTSP Address: An example of the RTSP address inputted in the media player.
4. You can also choose to enable anonymous viewer login.

Note: This device support VLC player. You can download the VLC player from the related website. Then run this player and input RTSP address by selecting “File” and clicking “Open URL”. After that, you can monitor the live image through VLC player.

5.4.8 UPNP

Enter into “Network Configuration”→ “UPNP” interface as shown in Fig 5-17. Select “Enable UPNP” and then input friendly name.

Fig 5-17 UPNP

Enable UPNP

Double-click the “My Network Places” icon on the desktop in PC and select “Show icons for networked UPnP devices” in the “Network Tasks” list box. Then an information window will pop up. Click “YES” button to see a “Windows Components Wizard” dialog box pop up as shown below. Then press “Next” to continue. After finished the installation of configuring components, the UPnP icons will display. Users can double-click certain icon to connect the remote surveillance login interface through IE.

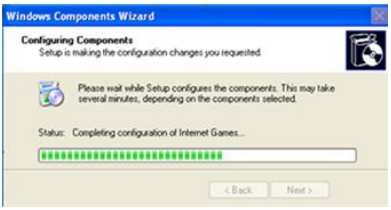
Windows Components Wizard
Configuring Components
Setup is making the configuration changes you requested.
Please wait while Setup configures the components. This may take several minutes, depending on the components selected.
Status: Completing configuration of Internet Games...
< Back
Next >

If “Show icons for networked UPnP devices” can’t display in the “Network Tasks” list box, please follow the below operation:

- Click “Tools”-- “Folder options”
- Check the “Show common tasks in folders” in the “Tasks” check box, UPnP icon will display.





5.4.9 Mail Setting

Enter into “Network Configuration” → “Mail Setting” interface. Please refer to Fig 5-18.

Fig 5-18 Mail Setting

1. From Email: sender's e-mail address
2. User name and password: sender's user name and password
3. Server address: SMTP name of sender
4.Select the secure connection type at the Secure Connection pull down list according to user' actual needs
5. Receival email address list: add email address into the list
6. Receival email address: receiver's e-mail address
7. After all parameters setup, user can click "Test your account settings". If email sent successful, a "Test Successful" window will pop up, if not, users can try other email addresses or check the setting.

Notice: If user change the static IP into PPPoE and select mailbox, there will be an e-mail sent to users' mail box for notify a new IP address.

5.4.10 FTP

Enter into Network Configuration→FTP interface; please refer to Fig 5-19:

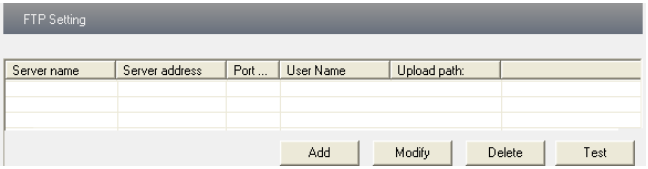

Fig 5-19 FTP Setting

1. Add: Click Add button to input FTP server's server name, address, port number, user name, password, and upload path, click OK to confirm the setting. Refer to Fig 5-20:
2. Modify： User can click this button to change some information of the FTP server
3. Delete： Select certain FTP account; Click this button to delete this account
4. Test ： Select certain FTP account; Click this button to test its valid or not.

Please refer to the following table for parameters and instructions of FTP configuration.



Fig 5-20 Add

Parameter	*Meaning*
Server name	The name of the FTP server
Server address	The address of the FTP server
Port	The port number of the FTP server
User name	The user name of the FTP server
Password	The password of the FTP server
Path	The save path for FTP files

5.5 Advanced Configuration

Advanced configuration includes five submenus: User Configuration, Onvif Configuration, Security Configuration, Configure Backup & Restore, Reboot and Upgrade.

5.5.1 User Configuration

Enter into "User Configuration" interface. Refer to Fig 5-21:

Add user:

1. Clicking "Add" button pops up "Add user" dialog box. Please refer to Fig 5-22:

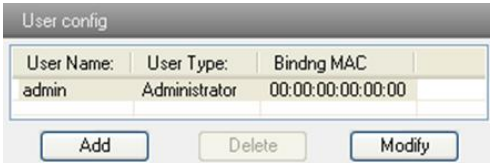

Fig 5-21 User Configuration



Fig 5-22 Add User

Note: After bind physical address to the IP-CAM, user can access the device on this PC in network only. If the MAC address was ““00:00:00:00:00:00” which means it can be connected to any computers.

2. Input user name in "User Name" textbox (only letters).
3. Input characters in "Password" and "Confirm Password" textbox (letters or numbers).
4. Input the MAC address of the PC in "Binding MAC address" textbox.
5. Click “OK” button and then the new added user will display in the user list.

Modify user:

1. Select the user which needs to modify password and physical address in the user configuration list box.
2. Clicking “Modify” button will pop up “Modify user” dialog box as shown below.

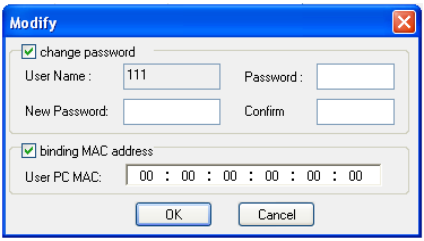

Fig 5-23 Modify User

3. Input original password of this user in the "password" text box.
4. Input new password in the "New password" and "Confirmation" text box.
5. Input computer's physical address which is used to access the server in the "User PC MAC" text box.
6. Click "OK" button to modify user's password and binding MAC address successfully.

Delete user:

1. Select the user which needs to delete in the user configuration list box.
2. Clicking "Delete" button will pop up a confirm dialog box. Then click "OK" to delete the user.

Note: The default super administrator cannot be deleted.

Parameter	*Meaning*
User Name	User name to operate the logon client end
User Type	Type of users, normal user, advanced user and super administrator
Binding MAC address	The MAC addresses of user access the server which should setup according to actual MAC address of server.
Password	Password to log in the client terminal
Confirm Password	Password to log in the client terminal

5.5.2 Onvif Configuration

This function is mainly used for connecting our device through other companies' monitoring platform software, such as, Hikvision, Axxon, Milestone., etc.

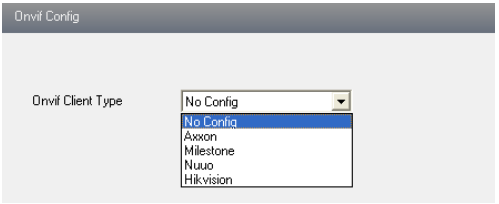

Fig 5-24 Onvif Config

5.5.3 Security Configuration

Enter into Advanced Configuration→Security Configuration to see a tab shown in Fig 5-25:

Check “Enable IP address” check box, select “Deny the following IP address”, input IP address in the IP address list box and click “Add” button. Then this IP address will display in the list box; the operation step of “Allow the following IP address” is the same with “Deny the following IP address”

Select the IP address which needs to be deleted from the IP address list box and click “delete” button to delete that IP address.

Check “Enable MAC address” check box, select “Deny the following IP address”, input MAC address in the MAC address list box and click “Add” button. Then this MAC address will display in the list box; the operation step of “Allow the following MAC address” is the same with “Deny the following IP address”.

4. Select the MAC address which needs to be deleted from the MAC address list box and click “delete” button to delete that MAC address.

5. Click "save" button to save the above setting.

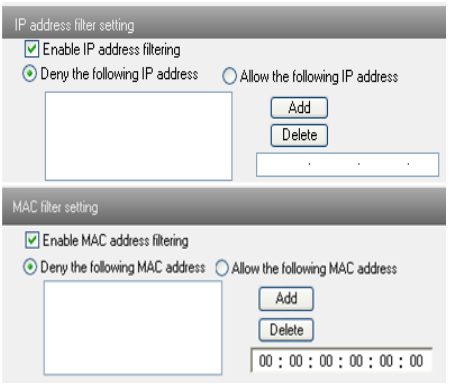

Fig 5-25 Security Configuration

5.5.4 Configure Backup & Restore

Enter into Advanced configuration→Configure Backup & Restore Interface. Refer to Fig 5-26.

- **Import & Export Configuration**:

User can import or export the setting information from PC or to device.

1. Click “Browse” to select save path for import or export information on PC.

2. User can import or export all setting information to PC, but those two settings “user configuration” and “network configuration” are exceptional.

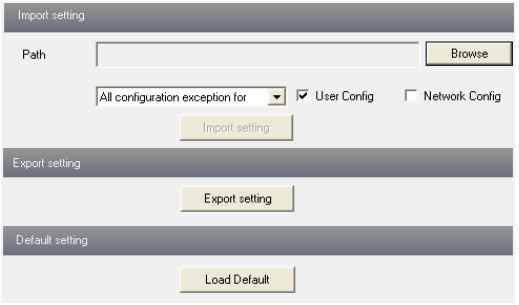

Fig 5-26 Backup and Restore Configuration

- **Default Configuration**

Click "Load default" button to restore all system settings to default status.

5.5.5 Reboot Device

Enter into Advanced configuration—Reboot device to see the interface as shown in Fig 5-27:

Click "Reboot device" button to reboot the device.



Fig 5-27 Reboot device interface

5.5.6 Upgrade

Enter into Advanced Configuration—Upgrade interface as shown in Fig 5-28:

1. Click "Browse" button to select the save path of the upgrade file
2. Click "Upgrade server firmware" button to start upgrading the application program
3. The device will restart automatically
4. After you successfully update the software, click "OK" button to close IE and then re-open IE to connect IP-Cam.

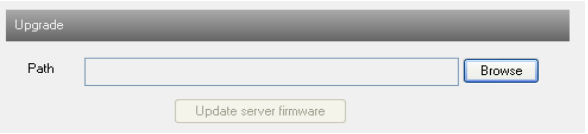

Fig 5-28 Upgrade

Notice: User can't disconnect to PC or close the IP-CAM during upgrade.

6 Mobile Surveillance

This IP-CAM supports mobile surveillance by phones with Windows mobile, iPhone, Android and Blackberry OS. Please check the operation system version of mobile before use; and connect the IP-CAM to Internet.

6.1 Network Configuration

- **Access device via LAN**

Step 1: Connect device via wireless router. Then checkmark DHCP both in router and device to automatically acquire IP address or enter the IP address manually.
Step 2: Use WIFI function in your mobile phone to connect the wireless router.
Note: Make sure your phone network and device network are in the same network segment on LAN.
Step 3: Add the IP address and port in the mobile phone surveillance client.

- **Access device via 3G network**

Step 1: Set the device network. Please enter Main Menu→Setup→Network tab.

- If you use PPPoE to connect device, please enable PPPoE and input username and password received from you ISP in network tab. Then click "Apply". You can enter Main Menu→Information→Network tab to see the IP address. If you want to utilize dynamic domain name, please apply for a domain name in a DNS server supported by the device.
- If you have a static WAN IP address, please enter Main Menu→Setup→Network tab to input your IP address, gateway and port.
- If you use LAN IP address, please enter Main Menu→Setup→Network tab to input your IP address, gateway and port and then forward IP address and port number in virtual server setup of the router or virtual server(If you has enabled the UPnP function in both the device and router, you can skip this step). Port forwarding setting may be different in different routers and servers. Please refer to the router's manual for details. After you forward your LAN IP address and port, please check the WAN IP address in the router or server.

Step 2: Add the WAN IP address or domain name in mobile phone surveillance client.

6.2 By Phones with iPhone OS

1. Install through Iphone.

Step 1: Open App Store software as shown in the figure on the left.
Step2: Search "SuperLive Pro" and click "Free" button as shown in the figure on the right.

Step 3: Click “Install App” button as shown in the figure on the left.
Step 4: Input iTunes Store password and then click “OK”. The software will be installed automatically.

◆ Install Software through PC

Step 1: Install iTunes store in PC and then login.

Step 2: Connect iPhone and PC.

Step 3: Search “SuperLivePro” and select it.

Step 4: Click “Download” button.

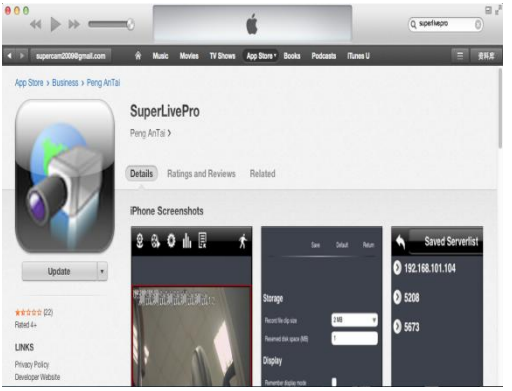

Step 5: Input username and password.

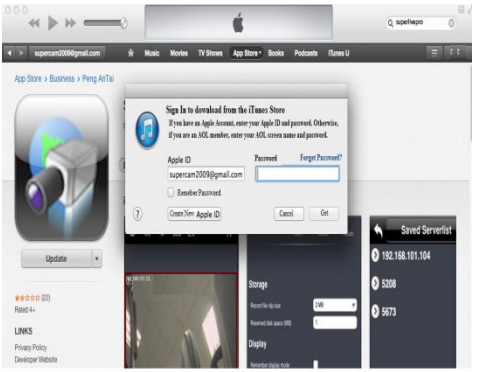

Step 6: Synchronously apply SuperLivePro software to iPhone/iPad.

◆ **SuperLivePro Instruction**

1. Login

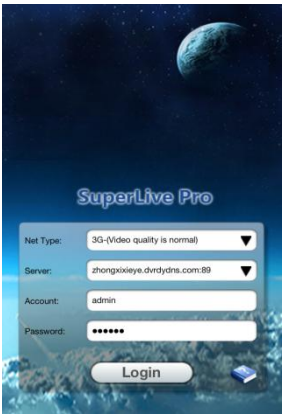

Step 1: Choose network type. There are two network connection ways:
3G/3G +WIFI, well video quality. This network supports main stream and sub stream. The real-time image will be displayed by using sub stream.
3G-, poor video quality contrast to the above mentioned network.
Step 2: Input server, account and password.

Server: WAN IP address (or domain name) plus HTTP port of the device. For example: 210.21.183:89 or 123.dvrdydns.com:89.
Note: The default http port of the device is 80. If this port is modified, please use the modified port.
Account and Password: The login account and password of the device. The default account is admin and the default password is 123456.

Step 3: Click【Login】button to access the device.

2. Main Interface

There are many buttons in the main interface, such as, screen mode, favorite channel, snap, record, open/close audio, talk, PTZ., etc.

: Image view button. The pictures snapped in the live will be checked by clicking this button.

: Playback button. Click this button to enter into playback interface.

: Settings button. Click this button to set local configuration (Some can also support remote configuration).

: Information button. Click this button to check lots of information including local information, device information, network information, etc.

: Server list button. Click this button to add server list.

: Help button. Help you know about the use of this software quickly.

: CMS button. Make you preview the live image of multi-devices.

: Log off button. Click this button to return to the login interface.

: Screen mode button. You can choose 1，4，6，8，9，13 or 16 screen display mode.

: Favorite channel display button. If you save your favorite channel in the favorite server list, clicking this button will directly play all favorite channels you have saved.

: Snap button. Choose the channel and click this button to capture the channel image.

: Local record button. Choose the channel and click this button to start recording.

: Open/Close audio. Choose the channel and click this button to open/close the audio of this channel.

: Open/Close talk. Click this button to pop up the servers which support talk function. Select the device to start talking.

: Set video parameter button. Select the channel and click this button to set the video parameters including brightness, hue, saturation and contrast.

: PTZ button. Click this button to pop up PTZ control panel.

: Choose bitrate priority or quality priority according to your network condition.

Channel indicator instruction:

: Video loss

: Schedule recording

: Others

: Sensor alarm

: Motion alarm

: Motion /sensor alarm based recording or manual recording

3. Server list

Click button to pop up the following picture.

➢ Add device: Click【Add】button in the top right corner to pop up a dialog box as shown in the following left picture. Input the relative information of the device and click【Save】button.

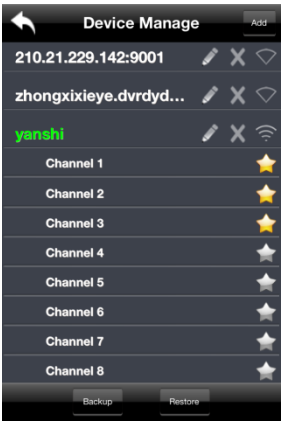

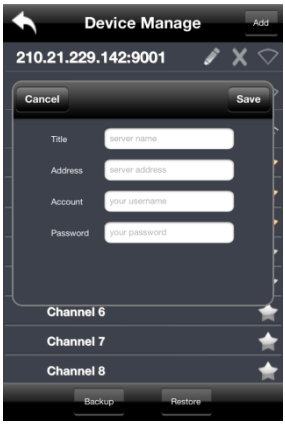

➢ Delete device: Click button behind the device name to delete this device.

➢ Edit device: Click button behind the device name to edit the information of this device.

➢ Backup & restore: It is recommended to click【Backup】button to reserve the information of all devices. Then you can click 【Restore】button to restore all device information after you re-install the client or delete the device uncarefully.

➢ indicates the device has been connected; indicates the device is connecting; indicates the device is not connected.

4. Live Preview

Once you access the device, the system will automatically display the screen mode in accordance with the channel number of the device

Note: The maximum number of channels which can be connected are nine after login.

➢ Click “Screen mode” button to select channel as shown in Fig 1.

➢ When there is video playing in a screen, you can switch the channel by long pressing the screen as shown in Fig 2.

➢ When no video is playing in a screen, click this screen to choose channel as shown in Fig 3.

➢ When the single channel is playing, you can zoom in/out the image by swiping you finger up and down as shown in Fig 4.

➢ When the single channel is playing, the channel can be switched by swiping your finger left or right as shown in Fig 5.

➢ When multi channels are playing, drag one channel screen to the other channel screen. This will make these two channels change the position of each other.

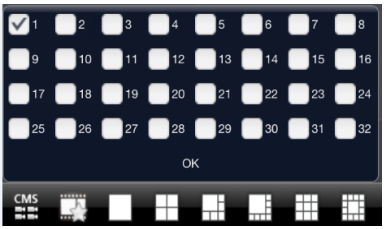

Fig 1



Fig 2



Fig 3



Fig 4



Fig 5

5. CMS Function

This function makes multi-device managements and preview come true.

Step 1: Click

to enable CMS function. When this icon turns green, it means this function is enabled.

Step 2: Click

to choose channel as shown in the right picture. After you choose the channel, click【ok】, the system will display the related image automatically.

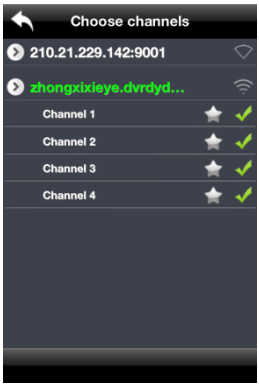

- If channels have been added into the group, you can see the images by clicking the group name.
- On viewing the group channel images, click button and select channels to check other channel images.
- Click【Exit CMS】to exit CMS mode and return to the main interface of the device.

6. Favorite Channel/Group

There are two kinds of favorite channels: favorite channels of the device and favorite group of CMS.

- **Favorite channels of the device**

Step 1: Click to enter into device management list. Click the device name to extend channel. Enlighten the channels to save favorite channels as shown in the following picture on the left.

Step 2: Return to the main interface and click button to play the favorite channels.

- **Favorite groups of CMS**

Enable CMS function and enlighten the group to save the favorite groups as shown in the following picture on the right.

Then click button to play. Only one favorite group can be collected.

: Color means the channel or group has been collected. Grey means the channel or group isn't collected.

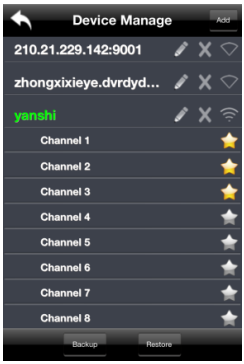

7. Playback Interface

Click “Playback” button to enter the playback interface. Then click “Search” button to search the file. To play the record by click this file name.

8. Image View

Click button to view the captured pictures.



9. Settings Interface

In this interface, you can configure the local settings.

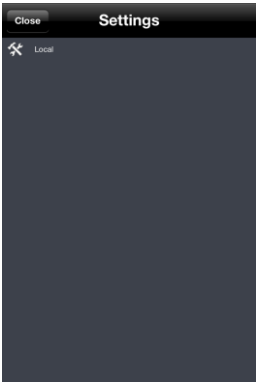

10. Information Interface

In this interface, you can view system information.



6.3 By Phones with Android OS

Software Installation

Step 1: Run “Play Store” (or Google market) program.

Step 2: Search “SuperLivePro”.

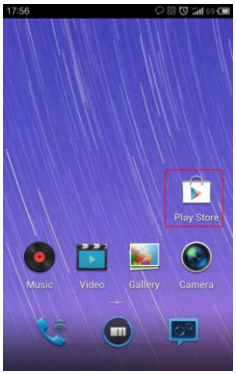

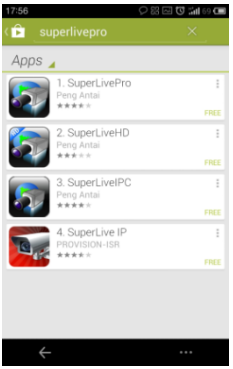

Step 3: Press “Install” button.

Step 4: Install the software subject to the notes. Once the downloading is done, the software will install automatically.

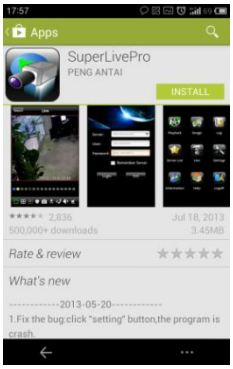

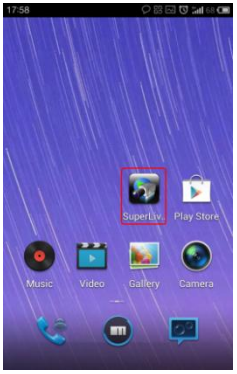

Login

Step 1: Configure the network of your device and mobile phone.

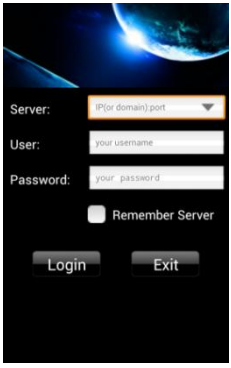

Step 2: Input the WAN IP address/domain name and port of your device in the sever column. The port should be HTTP port of your device. The default http port of the device is 80. If you have changed your http port, please enter the new port here. For example: 210.21.228.183:89 or 123.dvrdydns.com:89.

Step 3: Input the account and password of your device. The default account name is admin and the default password is 123456.

Step 4: Check "Remember Server" to save the setting. When you login next time, you can click ▼ button to select this server for quick access.

Main Menu

Live View

	PTZ
	Snap
REC	Record
	Talk
	Enable/disable audio
	Hide
	Playing favorite channel

Image View

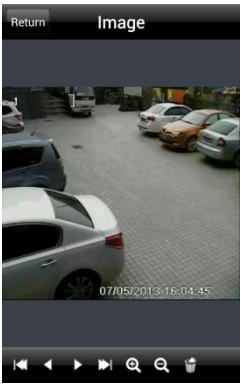

	The first picture
	The previous picture
	Next picture
	The last picture
	Zoom in
	Zoom out
	Delete

Record Playback

Click “Playback” in the main menu interface to enter playback interface. Then choose the channel you want to playback. This will take you to see the record file. Click this file to play.

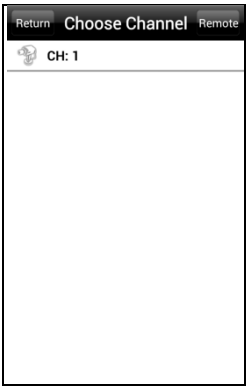

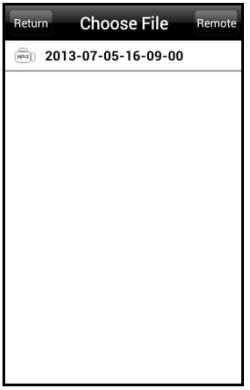

	Pause/Play
	Stop
	Forward
	Backward

Server List

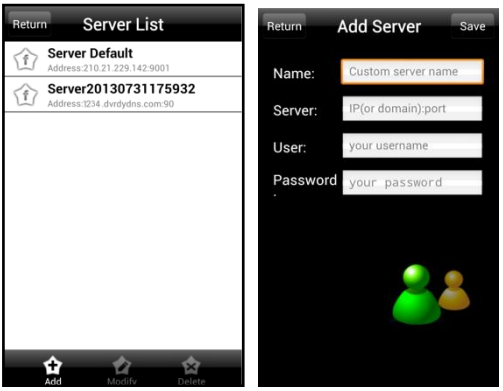

In the main menu interface, click “Server list” to see the above picture on the left hand.

Add Server: Click button to pop up a window as shown in the above picture on the right hand. Enter the name, server, user and password of the device you want to add. Then click【Save】button to save the server. When you log in next time, you can choose and quickly access this server by clicking the little triangle button in the server column.

Modify Server: Click button to modify the server information.

Delete Server: Click button to delete the server information...

Settings

In the main menu interface, click “Settings” to enter the settings interface where you can configure local settings.

Click “Local” to enter local settings interface. In this interface, you can set favorite channel and storage .

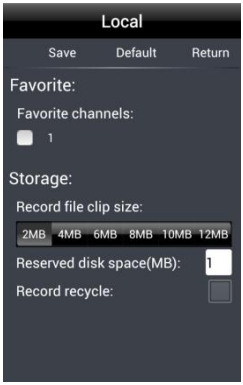

Favorite Channel: Check the favorite channels and click【Save】button to save these channels. Then go into live interface and click button to play these favorite channels.

Storage: Setup the relevant parameters of mobile video.

Information View

7 Use method for IP-TOOL

Updating through IP-Tool

Note: Do not cut off power supply and internet when updating; If the device is unable to start because of the failure of upgrade, it needs to retrofit.

First， acquire the IP-Tool from the supplier and then double click the IP-Tool icon

to run this software. Then the device can be searched; if the device can't be searched, please check whether the PC and the device connect to the network or not.

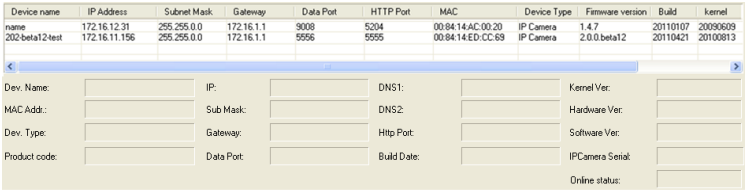

Click the device to check its detail information as shown below:

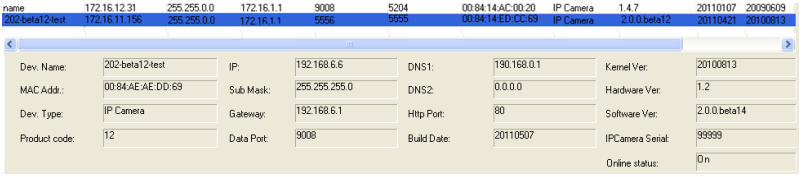

❖ Network Setup

When upgrading the software and kernel, the IP address of PC and device should be at the same network segment. If the network segment is different, user should change the IP address by right clicking the device and then select "network setup".

Modify IP address dialog box will appear as follows:

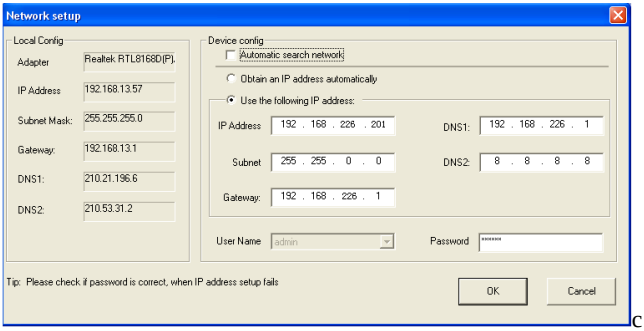

Modify IP address and click OK button to exit the dialog box, IP-Tool will display the new IP address.

❖ **Upgrading Software**

Select the device and right click to choose “Update software” menu. Input the username and password. Then click “browse” button to choose the upgrade software. Finally, click “Update software” to start upgrading. When upgrading, please do not disconnect PC and the device and make sure the power is on.

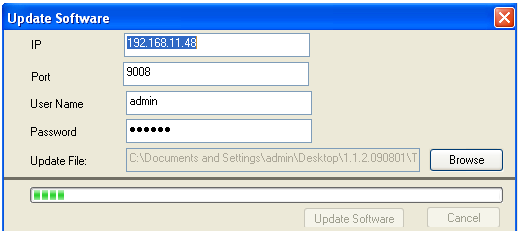

After finishing upgrading, a message box will pop up as below:

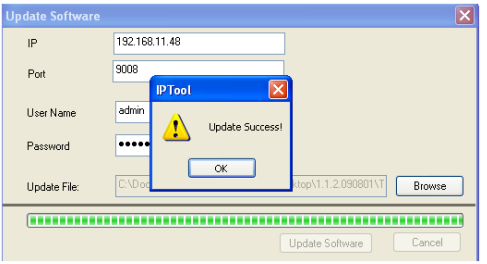

Click OK button to exit the update dialog box and then the device will restart automatically.

❖ **Upgrading Kernel**

Select the device and right click it to select “Update kernel” .

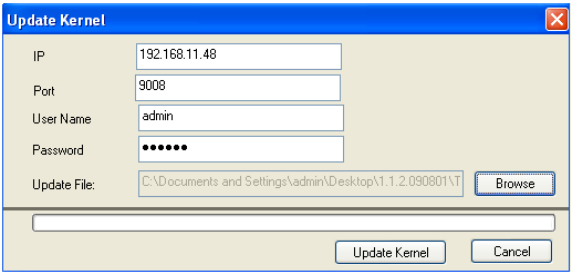

Enter into Kernel upgrade dialog box, input user name and password, click “Browse” to select the Update file (mboot8180-8180) and click “Update” button to start updating. When upgrading, please do not disconnect PC to device and make sure the power is on. The update progress bar will display as below:

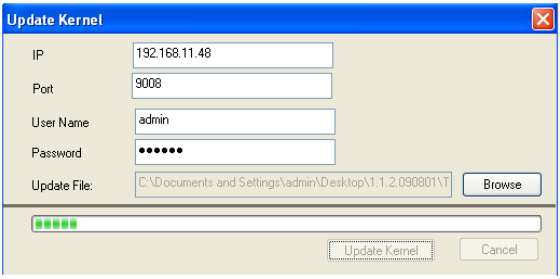

After finishing upgrading, a message box will pop up. After a while, the device will restart automatically.

❖ **Modifying Device Name**

Right click the device you want to modify and select “Modify Device Name” from the drop-down list. This will bring up a window for changing device name. Input new device name and click “OK” button to save the setting.

8 Q & A

1. Q: Forget password

A：Joint the default line and GND line to reset.

Note: Default IP: 192.168.226.201

User name: admin

Password: 123456

2. Q：Why can't the devices connect through IE browser?

A: Network doesn't connect well. Please check the connection and make sure it connected well.

B: IP is not available. Reset the valid IP.

C: Web port number has been revised: contact administrator to get the correct port number.

D: Exclude the above reasons. Recover default setting by jointing the default line and GND line.

Note: default IP: 192.168.226.201， mask number: 255.255.255.0

3. Q：IP tool cannot search devices.

A：It may be caused by the anti-virus software in your computer. Please exit it and try to search device again.

4. Q：IE cannot download ActiveX control.

a. IE browser blocks ActiveX. Please do setup following below.

① Open IE browser. Click Tools-----Internet Options….

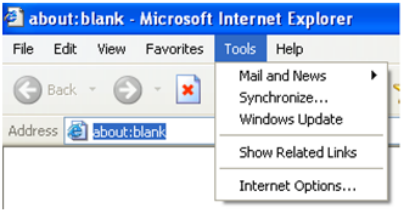

② select Security------Custom Level….Refer to Fig 4-1

③ Enable all the sub options under "ActiveX controls and plug-ins". Refer to Fig 4-2

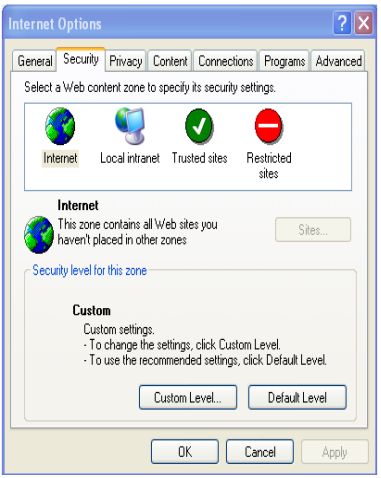

Fig 4-1

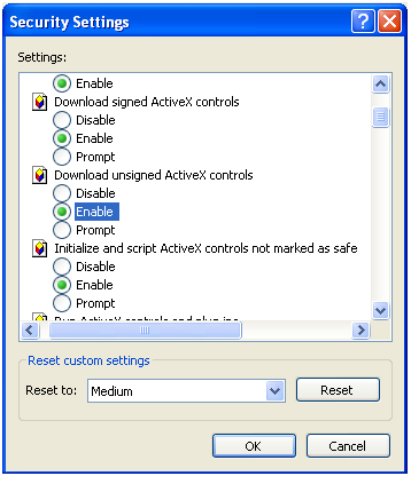

Fig 4-2

④ then click ok to finish setup.

b. Other plug-ins or anti-virus blocks ActiveX. Please uninstall or close them.

5. Q：No sound can be heard.

A：Without connect audio input device. Please connect and try again.

B: Without enable audio function at the corresponding channel. Please check AUDIO item to enable this function.

6. Q：Why can't the device connect to wireless?

A: Check the statues of wireless router. Please make sure the router is open

B: Check the router and the device port. Please make the router setup is matched with device port.

9 Specification

Model	2Mega Pixel Water-Proof IP Camera	
Image Sensor	1/3”CMOS	
Video Compression	H.264	
Audio Compression	G711A	
Image resolution	1080P, 720P, VGA, QVGA	
Shutter	1/25s~1/100000s	
Low illumination	0 Lux (IR ON)	
Lens	4mm, 6mm/8mm (optional)	
Resolution	1920x1080(1080P)；1280x720(720P), 640x780(VGA), 320x240 (QVGA)	
Stream	1080P: 512bps～8192kbps (1~30fps)	
	720P: 256bps～4096kbps (1~30fps)	
	VGA: 128bps～2048kbps (1~30fps)	
	QVGA: 64kbps～1024kbps(1~30fps)	
Audio	MIC IN*1	
Network Protocol	TCP/IP, DHCP, PPPoE, DDNS, SMTP, UPnP，RTSP,NTP	
IR Range	10~20m	No
Protection Grade	IP66	
Network Port	RJ45	
Remote Surveillance	IE Browse、CMS remote control	
Client Number	Max 4	
Power Supply	DC12V/PoE(optional)	
Working Environment	-10 ℃ ~50 ℃, 10%~90% humidity	